


Specifications :

- Voltage rating: 350V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -55°C~+105°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing: $\leq 40m\Omega$


X1511 T-P SN

① ② ③ ④


- ① Series Number
- ② Category : T-terminal
- ③ Material: P-Phosphor bronze
- ④ Plating style: SN-Bright tin plating




SECTION A-A
SCALE:1:1



SECTION B-B
SCALE:1:1



SECTION C-C
SCALE:1:1

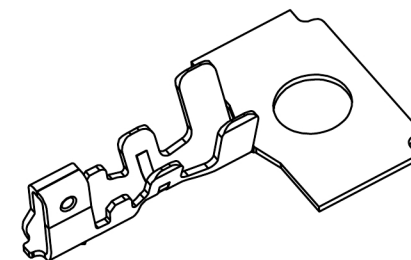

X1511T-PSN	Phosphor Bronze	AWG#24-30	1.10mm(Max)	Stamping Before Plating :30u" Ni/70u" Sn	X1511H
PARY N0	Matnal	Wire Range	Insulation O.D.	Finish	Suitable X1XB Terminal

DSND	DATE	SCALE: N/A	MODEL TYPE: 1.5mm Crimp Style Connectors
DWN	DATE	VIEW:	PART NO.: X1511T-PSN
CHKD	DATE	UNIT: mm/in	DWG NO.: X-X1511T-PSN
APPD	DATE	SIZE: A4	WEIGHT 1.0g
UNSPECIFIED TOLERANCES			SHEET 1/1
XKB INDUSTRIAL PRECISION CO., LIMITED			REVISION A0

广东星坤科技股份有限公司

ΔX	日期
Δ*	日期
Δ*	日期
MARK	DESCRIPTION

文件工程章