


Recommended P.C.B Layout

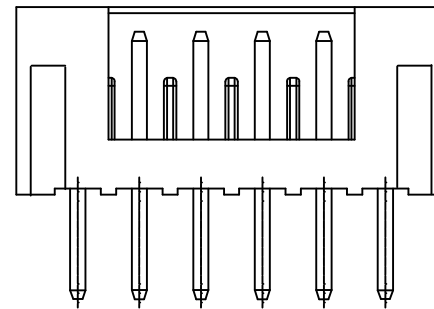

Specifications:

规格:

Voltage rating:100V AC/DC
 额定电压: 100V AC/DC
 Current rating:2A AC/DC
 额定电流: 2A AC/DC
 Withstanding voltage:800V AC/minute
 耐受电压: 800V AC/分钟
 Temperature range:-25°C~+85°C
 温度范围: -25°C~+85°C
 Insulation resistance:1000MΩ min
 绝缘电阻: 1000MΩ Min
 Contact resistance:20mΩ Max
 接触电阻: 20mΩ Max

X2016 W V - XX - N0 SN
 ① ② ③ ④ ⑤ ⑥

- 1.Series No
- 2.Category:W-Wafer
- 3.Welding Board Angle:V-Stright 180°
- 4.Row No.Pin No:XX-02~12P
- 5.Material:46-PA66 UL94V-0
- 6.Plating:SN-Bright Tin Plating

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	2.00	6.00	8	14.00	18.00
3	4.00	8.00	9	16.00	20.00
4	6.00	10.00	10	18.00	22.00
5	8.00	12.00	11	20.00	24.00
6	10.00	14.00	12	22.00	26.00
7	12.00	16.00			

X2016WV-XX-N0SN	PA46	Brass	X2016H
PART NO	Material	Material(Pin)	Suitable XKB Housing

DSND	SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN	VIEW:	PART NO.: X2016WV-XX-N0SN
CHKD	UNIT: mm/in	DWG NO.: X-X2016WV-XX-N0SN
APPD	SIZE: A4	



XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGULAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5