


Recommended P.C.B Layout

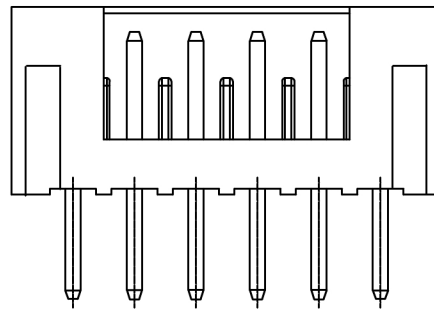

Specifications:

规格:

- Voltage rating: 100V AC/DC
- 额定电压: 100V AC/DC
- Current rating: 2A AC/DC
- 额定电流: 2A AC/DC
- Withstanding voltage: 800V AC/minute
- 耐受电压: 800V AC/分钟
- Temperature range: -25°C~+85°C
- 温度范围: -25°C~+85°C
- Insulation resistance: 1000MΩ min
- 绝缘电阻: 1000MΩ Min
- Contact resistance: 20mΩ Max
- 接触电阻: 20mΩ Max

X2016 W V - XX - 46 SN
 ① ② ③ ④ ⑤ ⑥

1. Series No
2. Category: W-Wafer
3. Welding Board Angle: V-Stright 180°
4. Row No. Pin No: XX-02~12P
5. Material: 46-PA46 UL94V-0
6. Plating: SN-Bright Tin Plating

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2	2.00	6.00	8	14.00	18.00
3	4.00	8.00	9	16.00	20.00
4	6.00	10.00	10	18.00	22.00
5	8.00	12.00	11	20.00	24.00
6	10.00	14.00	12	22.00	26.00
7	12.00	16.00			

X2016WV-XX-46SN	PA46	Brass	X2016H
PART NO	Material	Material(Pin)	Suitable XKB Housing

广东星坤科技股份有限公司

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	



DSND	SCALE: N/A	MODEL TYPE: 2.0mm Crimp Style Connector
DWN	VIEW:	PART NO.: X2016WV-XX-46SN
CHKD	UNIT: mm/in	DWG NO.: X-X2016WV-XX-46SN
APPD	SIZE: A4	WEIGHT SHEET REVISION 1/1 A0

XKB INDUSTRIAL PRECISION CO., LIMITED

文件工程章