

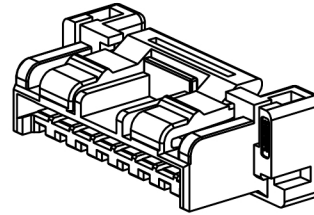
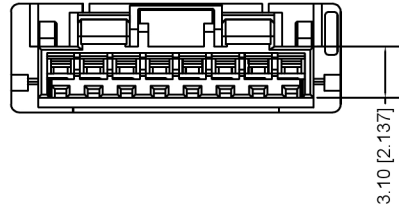



XKB




Specifications:

规格:  
Voltage rating:250V AC/DC XKB  
额定电压: 250V AC/DC  
Current rating:3A AC/DC  
额定电流: 3A AC/DC  
Withstanding voltage:800V AC/minute  
耐受电压: 800V AC/分钟  
Temperature range:-40℃~+105℃  
温度范围: -40℃~+105℃  
Insulation resistance:≥1000MΩ  
绝缘电阻: ≥1000MΩ  
Contact resistance:≤20mΩ  
接触电阻: ≤20mΩ  
After environmental XKB testing:≤40mΩ  
环境测试后: ≤40兆欧

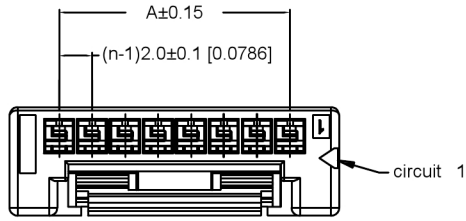

2P-7P




5P-7P外观形状

X2023 H -XX -N0


- ① Series No.
- ② Category:H-HSG
- ③ Row No.Pin No.: XX-02P-15P;
- ④ Material:N0 -PA66 94V-0



11P-15P外观形状




8P-15P外观形状




2P-4P外观形状

Poles	Dimension mm			Poles	Dimension mm		
	A	B	C		A	B	C
2	2.00	8.00	4.70	09	16.00	22.00	18.70
3	4.00	10.00	6.70	10	18.00	24.00	20.70
4	6.00	12.00	8.70	11	20.00	26.00	22.70
5	8.00	14.00	10.70	12	22.00	28.00	24.70
6	10.00	16.00	12.70	13	24.00	30.00	26.70
7	12.00	18.00	14.70	14	26.00	32.00	28.70
8	14.00	20.00	16.70	15	28.00	34.00	30.70

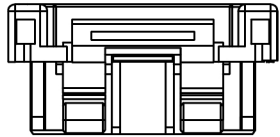

5P-15P 锁扣形状



锁扣形状

X2023H-XX -N0	PA66 UL 94V-0	X2023T	X2023W
PART NO	Material	Suitale XKB Teminal	Suitale XKB Teminal

广东星坤科技股份有限公司

ΔX	日期
ΔX	日期
ΔX	日期
MARK	DESCRIPTION

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ANGLAR				±5°
L ≤ 4				±0.2
4 < L ≤ 16				±0.3
16 < L ≤ 63				±0.4
L > 63				±0.5

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB

DSND		SCALE: N/A	MODEL TYPE: X2023H-XX-N0
DWN		VIEW:	PART NO.: 2.0 mm Crimp Style Connector
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	

XKB INDUSTRIAL PRECISION CO., LIMITED

WEIGHT	SHEET	REVISIC
	1/1	A0