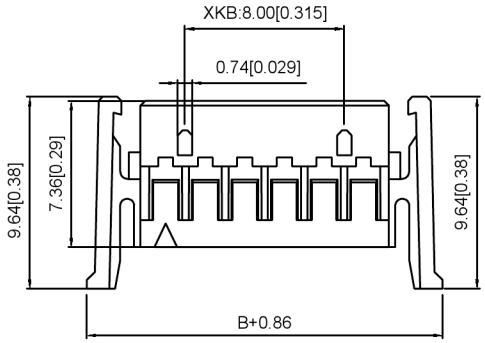

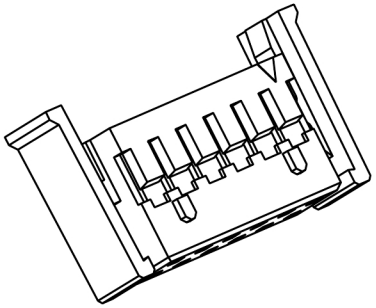

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压：800V AC/分钟
Temperature range:-25℃-+85℃
温度范围：-25℃-+85℃
Insulation resistance:≥1000MΩ
绝缘电阻：≥1000MΩ
Contact resistance:≤10mΩ
接触电阻：≤10mΩ
After environmental testing:≤20mΩ
环境测试后：≤20兆欧

X2026 H X-2xXX AH-N0 XX
① ②③ ④ ⑤ ⑥ ⑦

1.Series No
2.Category:H-HSG
3.Appearance type:Blank-Ordinary
4.Row No-Pin No:2xXX-2x02P~2x22P
5.Plug the Pin&Special N0:
A-With Lock; H-Higsh Salient Point
6.Material:N0-PA66 94V-0
7.Color:Blank-Natural Color

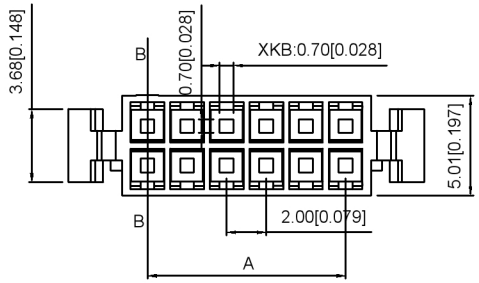



poles	Dimensions(mm)			poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C		A	B	C
2x02	2.00	9.00	4.50	2x09	16.00	23.00	18.50	2x16	30.00	37.00	32.50
2x03	4.00	11.00	6.50	2x10	18.00	25.00	20.50	2x17	32.00	39.00	34.50
2x04	6.00	13.00	8.50	2x11	20.00	27.00	22.50	2x18	34.00	41.00	36.50
2x05	8.00	15.00	10.50	2x12	22.00	29.00	24.50	2x19	36.00	43.00	38.50
2x06	10.00	17.00	12.50	2x13	24.00	31.00	26.50	2x20	38.00	45.00	40.50
2x07	12.00	19.00	14.50	2x14	26.00	33.00	28.50				
2x08	14.00	21.00	16.50	2x15	28.00	35.00	30.50				

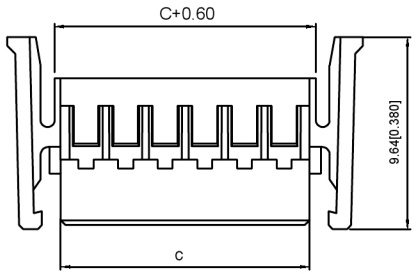



B-B

X2026H-2xXXAH-N0	Nylon 66 UL 94V-0	X2026T	X2026W-A
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

广东星坤科技股份有限公司
文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
Δx				
Δx				
Δx				

REVISIONS

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

XKB INDUSTRIAL PRECISION CO.,LIMITED

MODEL TYPE: Wire to board connector
PART NO.: 2.00mm Crimp Style Connectors
DWG NO.: X2026H-2xXXAH-N0

WEIGHT	SHEET	REVISION
1.0g	1/1	A0