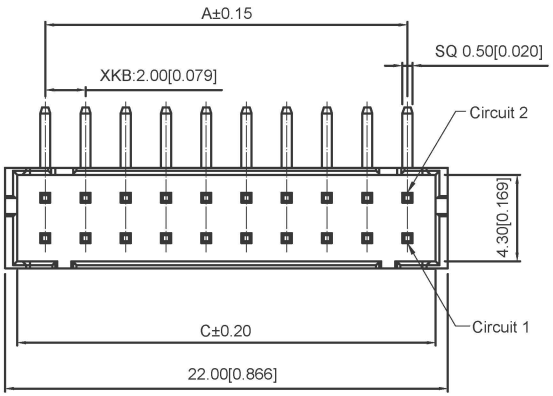

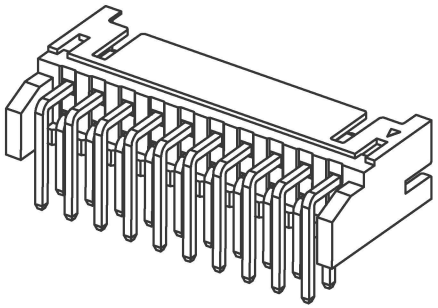

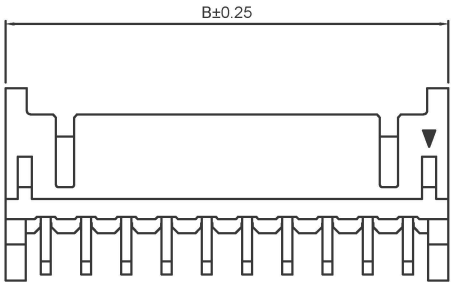

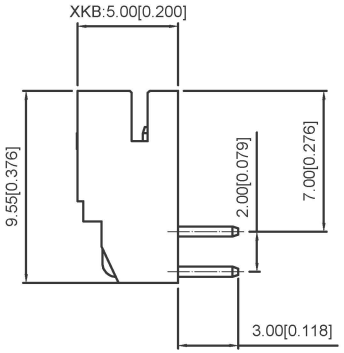

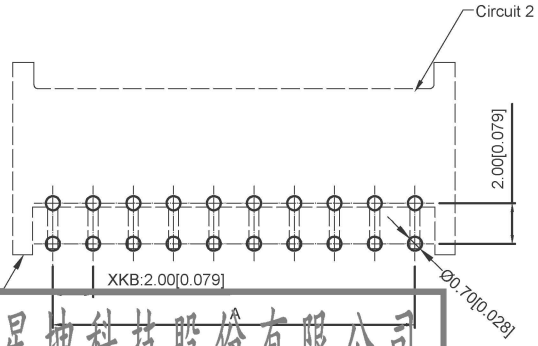

Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:3A AC/DC
额定电流：3A AC/DC
Withstanding voltage:800V AC/minute
耐受电压：800V AC/分钟
Temperature range:-25℃-+85℃
温度范围：-25℃-+85℃
Insulation resistance:≥1000MΩ
绝缘电阻：≥1000MΩ
Contact resistance:≤10mΩ
接触电阻：≤10mΩ
After environmental testing:≤20mΩ
环境测试后：≤20兆欧

X2026 W R X-2xXXX-NOXXXXX
① ②③④ ⑤⑥ ⑦ ⑧ ⑨

1.Series No
2.Category:W-WAFER
3.Welding Board Angle:R-Right Angle 90°
4.Welding Way:Blank-DIP
5.Row No-Pin No:2xXX-2x02P~2x22P
6.Plug the Pin&Special N0:
7.Material:N0-PA66 94V-0
8.Plating Category:SN-Bright Tin Plating
V01-All Gold Flash
9.Color:Blank-Natural Color

poles	Dimensions(mm)			poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C		A	B	C
2x02	2.00	6.00	4.80	2x09	16.00	20.00	18.80	2x16	30.00	34.00	32.80
2x03	4.00	8.00	6.80	2x10	18.00	22.00	20.80	2x17	32.00	36.00	34.80
2x04	6.00	10.00	8.80	2x11	20.00	24.00	22.80	2x18	34.00	38.00	36.80
2x05	8.00	12.00	10.80	2x12	22.00	26.00	24.80	2x19	36.00	40.00	38.80
2x06	10.00	14.00	12.80	2x13	24.00	28.00	26.80	2x20	38.00	42.00	40.80
2x07	12.00	16.00	14.80	2x14	26.00	30.00	28.80	2x21	40.00	44.00	42.80
2x08	14.00	18.00	16.80	2x15	28.00	32.00	30.80	2x22	42.00	46.00	44.80

PART NO	Material	Material(pin)	Finish(Pin)	Suitable XKB Terminal
X2026WR-2xXX-N0V01	PA66 UL 94V-0	Brass	Gold-Flash	X2026H
X2026WR-2xXX-N0SN			Tin-Plated	

广东星坤科技股份有限公司

生效日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

units:	mm
tolerance:	
X.X	±0.2mm
X.XX	±0.1mm
X.XXX	±0.05mm

UNSPECIFIED TOLERANCES

DSND		DATE		SCALE: N/A
DWN		DATE		VIEW:
CHKD		DATE		UNIT: mm/in
APPD		DATE		SIZE: A4

MODEL TYPE: Wire to board connector
PART NO.: 2.00mm Crimp Style Connectors
DWG NO.: X2026WR-2xXX-N0XXX

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0

www.xk-dg.cn www.helloxkb.com www.helloxkb.cn