


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	2024.01.15	

TECHNICAL DATE
 PIN(OUTER SLEEVE):BRASS,MACHINED CuZn38Pb2
 INSULATOR:PPS UL94V-0 COLOUR:BLACK
 CURRENT RATING:3Amps
 MATING PIN ϕ :0.47/0.64mm
 CONTACT RESISTANCE: 10m Ω MAX
 DIELECTRIC STRENGTH:1000V RMS
 OPERALING TEMPERATURE:-40 °C TO +105°C
 SOLDERING TEMPERATURE:+255°C

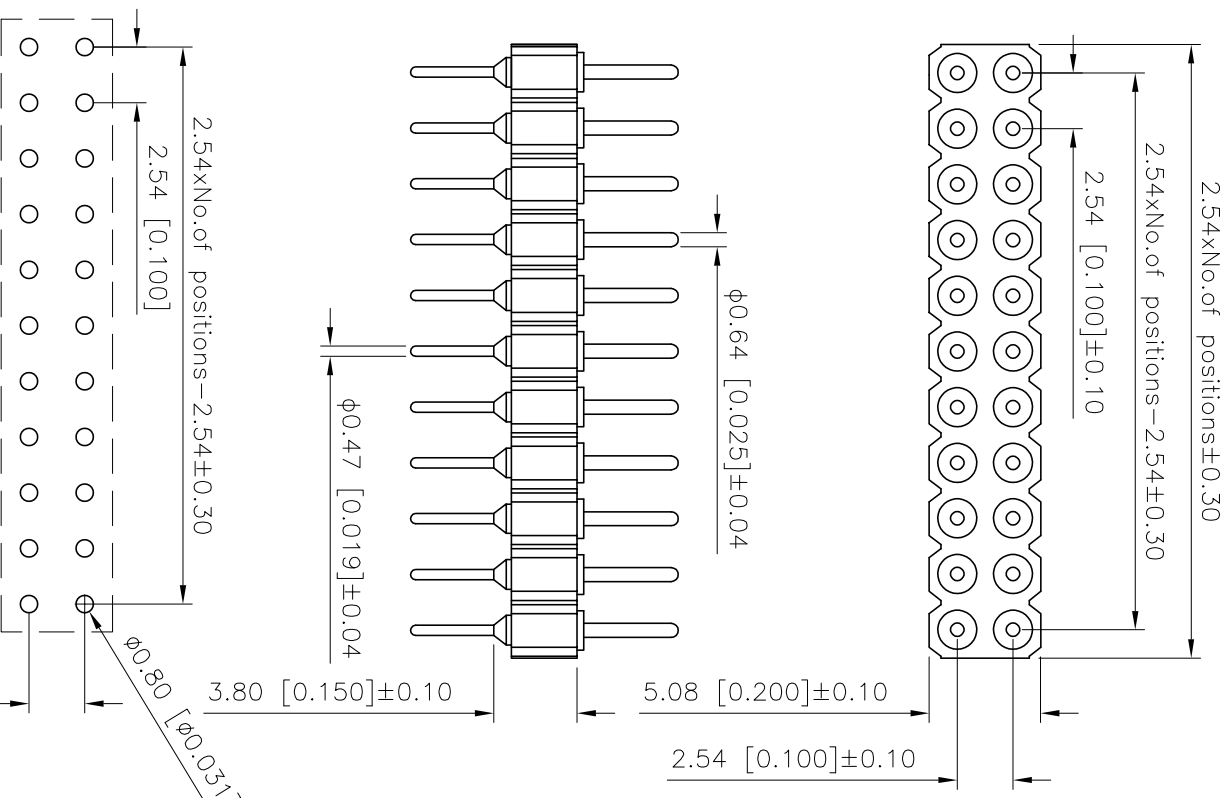


PART NO.:

X5521 W V-2xxx-C46 D46 1220
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No
- ② Category:W-Adfaer
- ③ Welding Board Angle:V-Straight 180°
- ④ Row No-Pin
- ⑤ Plastic Height:C=4, 6mm
- ⑥ Pin Length:D=4, 6mm
- ⑦ 1220:Type1220

X5521W-2xxx-C46D46-1220	PPS 94V-0	BRASS	TIN/GOLD 1u"	X5521F
PART NO.	MATERIAL	MATERIAL(TERMINAL)	FINISH(TERMINAL)	MATES WITH XKB PIN HEADER

ANGULAR	±5°
X.	±0.40
X.X	±0.30
X.XX	±0.20
X.XXX	±0.15
UNSPECIFIED TOLERANCES	

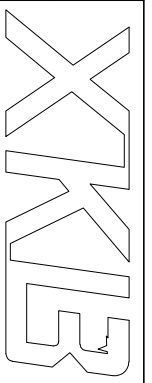

DESIGN	桑葚	VIEW:		MODEL TYPE:	2.0mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X5521W-2xxx-C46D46-1220
APPROVED		SIZE:	A4	DWG NO.:	

Recommended P.C.B
 Layout(±0.05)

www.hellokko.com www.hellokko.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A0