




R1 TYPE

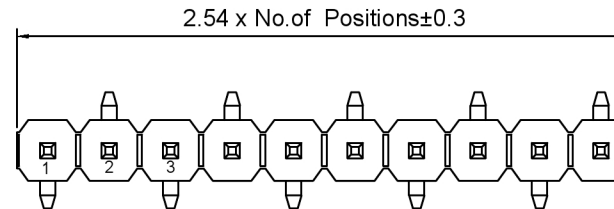

R2 TYPE

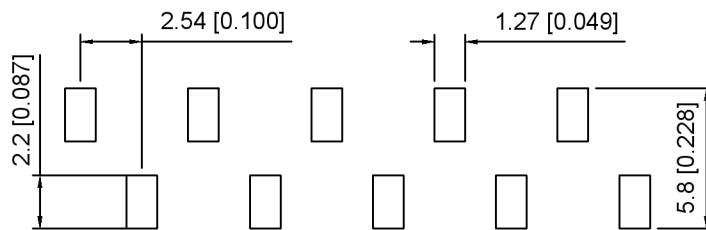

PCB LAYOUT

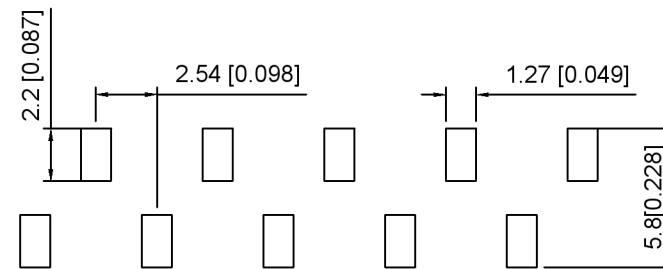

PCB LAYOUT

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-40°C-+105°C

温度范围: -40°C-+105°C

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold

镀层: 1U"Gold

Reflow soldering temperature:260±5°C, 10S

回流焊温度: 260±5°C, 10S

X6511 W V S -XX H - C60 D48 X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

1.Series No

2.Category:W-Wafer

3.Welding Board Angle:V-Stright 180°

4.Welding Way:S-SMT

5.Row No.Pin No:XX-02~40P

6.Plastic Height:H=2.5mm

7.Pin Length:C=6.0mm

8.Pin Length:D=3.0mm

9.Type:X-R1 ; R2

X6511WVS-XXH-C60D48X	PA6T	Brass	X6511F
PART NO	Material	Material(Pin)	Suitable XKB Female

DSND	SCALE: N/A	MODEL TYPE: 2.54mm BTB Connector
DWN	VIEW:	PART NO.: X6511WVS-XXH-C60D48X
CHKD	UNIT: mm/in	DWG NO.: X-X6511WVS-XXH-C60D48X
APPD	SIZE: A4	WEIGHT SHEET REVISION 1/1 A0



XKB INDUSTRIAL PRECISION CO.,LIMITED

广东星坤科技股份有限公司

DATE	日期
REVISIONS	文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED
------	-------------	------	---------	----------

ANGLAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	