






Specifications:

- 规格:  
 Voltage rating:250V AC/DC  
 额定电压: 250V AC/DC  
 Current rating:2A AC/DC  
 额定电流: 2A AC/DC  
 Withstanding voltage:1000V AC/minute  
 耐受电压: 1000V AC/分钟  
 Temperature range:-40°C~+85°C  
 温度范围: -40°C~+85°C  
 Insulation resistance:≥500MΩ  
 绝缘电阻: ≥500MΩ  
 Contact resistance:≤20mΩ  
 接触电阻: ≤20mΩ  
 After environmental testing:≤30mΩ  
 环境测试后: ≤30mΩ

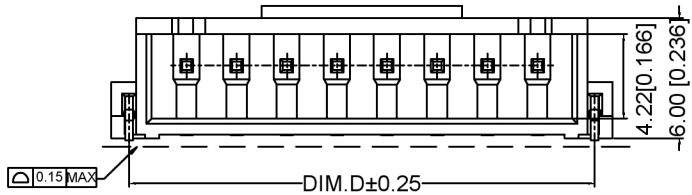

X8821 W R S-XX L -LP SN  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Category:W-WAFER
- ③ Welding Board Angle: R-Right Angle 90°
- ④ Welding Way:S-SMT
- ⑤ Row No.Pin No.: XX-02P~16P;
- ⑥ Plug the Pin&Special No:L-With Lock
- ⑦ Material: LP-LCP UL94V-0
- ⑧ Plating Category: SN-Bright Tin Plating

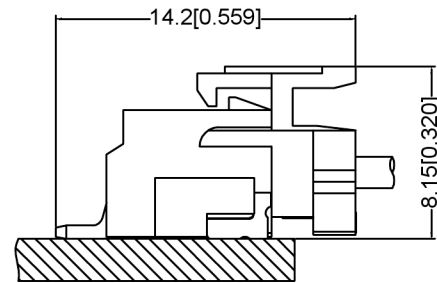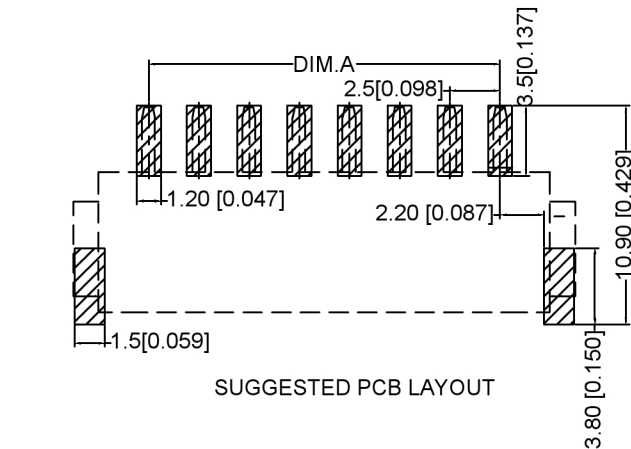

Assembly Layout

Poles	Dimension mm				Poles	Dimension mm			
	A	B	C	D		A	B	C	D
2	2.50	7.50	10.00	8.20	10	22.50	27.50	30.00	28.20
3	5.00	10.00	12.50	10.70	11	25.00	30.00	32.50	30.70
4	7.50	12.50	15.00	13.20	12	27.50	32.50	35.00	33.20
5	10.00	15.00	17.50	15.70	13	30.00	35.50	37.50	35.70
6	12.50	17.50	20.00	18.20	14	32.50	37.50	40.00	38.20
7	15.00	20.00	22.50	20.70	15	35.00	40.00	42.50	40.70
8	17.50	22.50	25.00	23.20	16	37.50	42.50	45.00	43.20
9	20.00	25.00	27.50	25.70					

X8821WRS-XXL-LPSN	LCP UL 94V-0	Phosphor Bronze	Tin-Plated	X8821H-L
PART NO	Material	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Mates With XKB Housing

XKB

DSND	DATE	SCALE: N/A	MODEL TYPE: 2.50 mm Crimp Style Connectors
DWN	DATE	VIEW:	PART NO.: X8821WRS-XXL-LPSN
CHKD	DATE	UNIT: mm/in	DWG NO.: X-X8821WRS-XXL-LPSN
APPD	DATE	SIZE: A4	WEIGHT
XKB INDUSTRIAL PRECISION CO.,LIMITED			SHEET
			REVISION
			1/1
			A0

广东星坤科技股份有限公司

Δx	日期
Δx	日期
Δx	日期
MARK	DESCRIPTION
文件	工程章

				XKB	ANGLAR	±5°
					≤4	±0.2
					4<L≤16	±0.3
					16<L≤63	±0.4
					L>63	±0.5
					UNSPECIFIED TOLERANCES	