
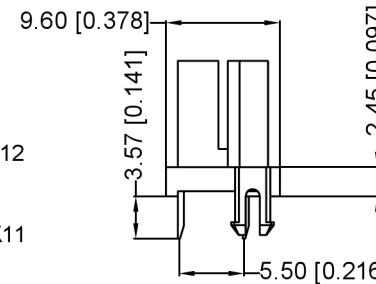



PART NO.	Dimensions(mm)		
	A	B	C
2X01	/	5.40	9.40
2X02	4.20	9.60	13.60
2X03	8.40	13.80	17.80
2X04	12.60	18.00	22.00
2X05	16.80	22.20	26.20
2X06	21.00	26.40	30.40
2X07	25.20	30.60	34.60
2X08	29.40	34.80	38.80
2X09	33.60	39.00	43.00
2X10	37.80	43.20	47.20
2X11	42.00	47.40	51.40
2X12	46.20	51.60	55.60

SPECIFICATIONS
 Voltage rating: 600V AC, DC
 Current rating: 7A, AC, DC
 Withstanding Voltage: 1500V AC/minute
 Insulation resistance: 1000M min
 Temperature range: -25° C~+85°C
 Contact resistance: 20m. max
 WAFER
 Poles : 02-24P
 Housing Material: PA66 UL94V-0 or UL94V-2
 Pin Material: Phosphor Bronze
 Contact Area: Selective Gold or Matte Tin
 Plating Thickness Min;
 Soldering Area: Matte Tin 100u" Plating Thickness Min
 Under Plating: Nickel Plating 50u"

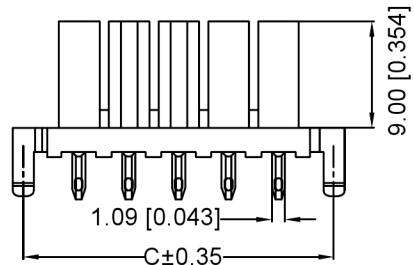


X9357 W V- 2xXX - N2 SN
 ① ② ③ ④ ⑤ ⑥

- Series No.
- Category: W-Wafer
- Welding Board Angle: V- Stright 180°
- Row No. Pin No: 2xXX-2x01P~2x12P
- Material: N0-PA66 94V-0; N2-PA66 94V-2
- Plating Category: SN-Bright Tin Plating
V01-Plating Gold Flash

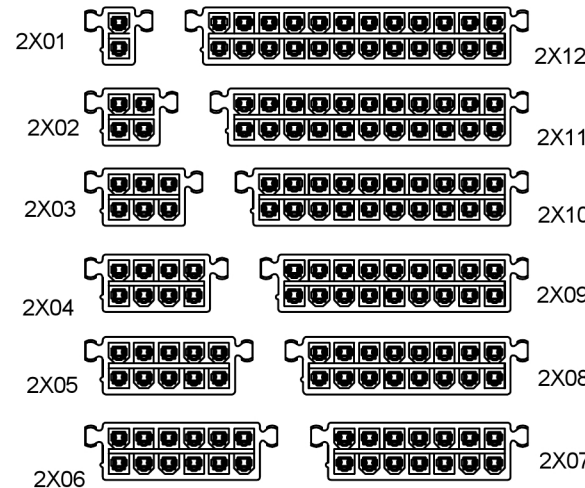

CIRCUIT SIZE LAYOUT

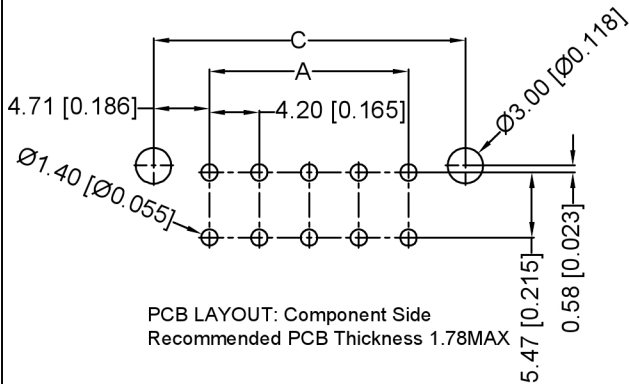

PCB LAYOUT: Component Side
 Recommended PCB Thickness 1.78MAX

X9357WV-2xXX-N2SN	PA66 UL94V-2	Brass	X9357HM
PART NO	Material	Material(Pin)	Suitable XKB Housing

XKB

DSND	DATE	SCALE: N/A	MODEL TYPE: 4.2 mm Crimp Style Connector:
DWN	DATE	VIEW:	PART NO.: X9357WV-2xXX-N2SN
CHKD	DATE	UNIT: mm/in	DWG NO.: X-X9357WV-2xXX-N2SN
APPD	DATE	SIZE: A4	WEIGHT SHEET REVISIT 1.0g 1/1 A0
XKB INDUSTRIAL PRECISION CO., LIMITED			

广东星坤科技股份有限公司
 日期
 文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES