
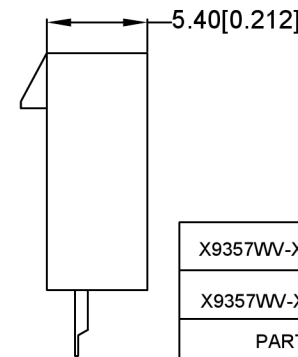


Recommend PCB Layout

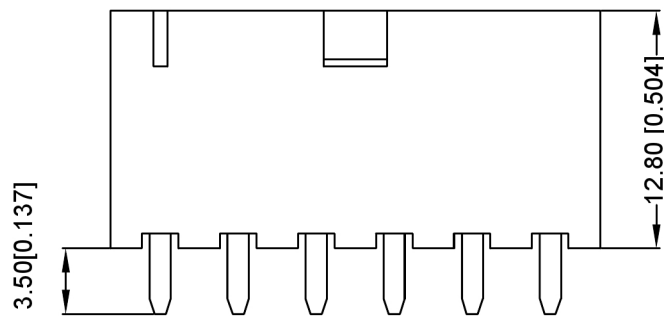

Specifications:

规格:
Voltage rating:600V AC/DC
额定电压: 600V AC/DC
Current rating:9A AC/DC
额定电流: 9A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压: 1500V AC/分钟
Temperature range:-25℃~+85℃
温度范围: -25℃~+85℃
Insulation resistance:≥1000MΩ
绝缘电阻: ≥100MΩ
Contact resistance:≤10mΩ
接触电阻: ≤10mΩ_{XKB}
After environmental testing:≤20mΩ
环境测试后: ≤20兆欧

X9357 W R X-XX HN-XX SN XX
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- 01 Series No.
- 02 Category: W-wafer
- 03 Welding Board Angle: V-180°
- 04 Welding Way: Blank-DIP;
- 05 Row No.-Pin No
XX-Single row
- 06 Special NO.
HN-The hollow needle
- 07 Material:
NO-PA66 94V-0;N2-PA66 94V-2
- 08 Planting Category: V:Al Gold-Plated
G:Gold-Plated Contact
S-Silver Plating
*01-Gold Flash;*02-2u";*03-3u";*05-5u"10-10u
*15-15u";*30-30u";*50-50u"
N-Plating Nickel 30-50u";SN-Bright tin plating 70u" SW-Fog Tin plating
- 09 Color:
Blank-natural color

Poles	Dimensions(mm)	
	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

X9357WV-XXHN-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	X9357H
X9357WV-XXHN-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	X9357H
PART NO	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

广东星坤科技股份有限公司

Δx
Δx
Δx
MARK

日期

REVISIONS

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

ANGULAR ±5°
 L ≤ 4 ±0.2
 4 < L ≤ 16 ±0.3
 16 < L ≤ 63 ±0.4
 L > 63 ±0.5
 UNSPECIFIED TOLERANCES

XKB

XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 4.2mm Crimp Style Connector
DWN	VIEW:	PART NO.: X9357WV-XXHN-N2SN
CHKD	UNIT: mm/in	DWG NO.: X9357WV-XXHN-N2SN
APPD	SIZE: A4	WEIGHT SHEET REVISIC 1/1 A0

文件工程章