


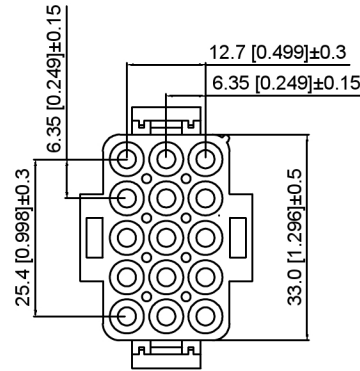







3x03 Pin

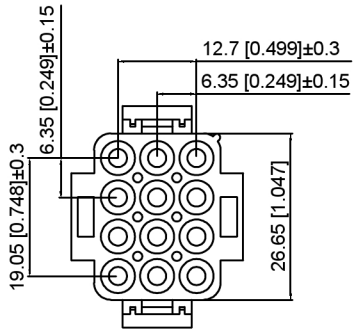


3x05 Pin



3x04 Pin

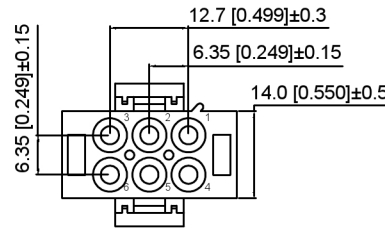

2x03 Pin



Specifications:

规格:

- Voltage rating: 300V AC/DC
- 额定电压: 300V AC/DC
- Current rating: 13A AC/DC
- 额定电流: 13A AC/DC
- Withstanding voltage: 1500V AC/minute
- 耐受电压: 1500V AC/分钟
- Temperature range: -25°C +85°C
- 温度范围: -25°C +85°C
- Insulation resistance: 1000MΩ min
- 绝缘电阻: 1000MΩ Min
- Contact resistance: 20mΩ Max
- 接触电阻: 20mΩ Max

X9635 H M - 3xXX - N2

- ①
- ②
- ③
- ④
- ⑤

1. Series No
2. Category: H-HSG
3. Category: M-Male Housing
4. Row No. Pin No: 3xXX-3x02~3x05Pin or 2xXX-2x03Pin
5. Material: N0-Nylon 66 UL94V-0
N2-Nylon 66 UL94V-2

X9635HM-3xXX-N0	Nylon 66 UL94V-0	X9635W	X9635HF	X9635TF
X9635HM-3xXX-N2	Nylon 66 UL94V-2			
X9635HM-2xXX-N0	Nylon 66 UL94V-0			
X9635HM-2xXX-N2	Nylon 66 UL94V-2			
PART NO	Material	Suitable XKB Wafer	Suitable XKB Housing	Suitable XKB Terminal

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGULAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5



DSND	SCALE: N/A	MODEL TYPE: 6.35mm Crimp Style Connector
DWN	VIEW:	PART NO.: X9635HM-3xXX-N2
CHKD	UNIT: mm/in	DWG NO.: X-X9635HM-3xXX-N2
APPD	SIZE: A4	

文件工程章

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn				