




Specifications:
 规格:
 Voltage rating:150V AC/DC
 额定电压: 150V AC/DC
 Current rating:1A AC/DC
 额定电流: 1A AC/DC
 Withstanding voltage:500V AC/minute
 耐受电压: 500V AC/分钟
 Temperature range:-40°C~+85°C
 温度范围: -40°C~+85°C
 Insulation resistance:500MΩ min
 绝缘电阻: 500MΩ Min
 Contact resistance:30mΩ Max
 接触电阻: 30mΩ Max

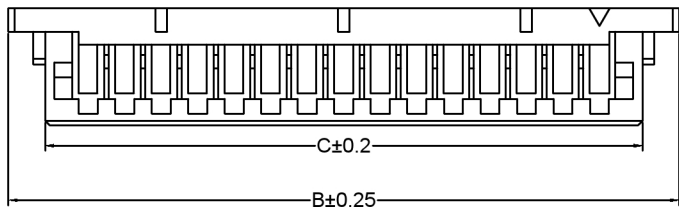

X9812 H - 2xXX - N0
 ① ② ③ ④

- 1.Series No
- 2.Category:H-HSG
- 3.Row No.Pin No:2xXX-2x02~2x25P
- 4.Material:N0-PA66 UL94V-0

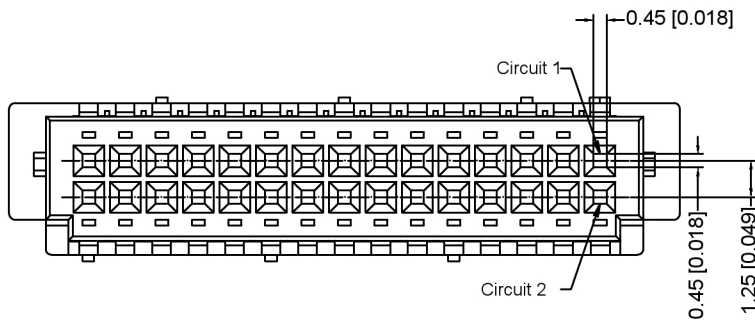

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
2*02	1.25	6.70	4.20	2*13	15.00	20.45	17.95
2*03	2.50	7.95	5.45	2*14	16.25	21.70	19.20
2*04	3.75	9.20	6.70	2*15	17.50	22.95	20.45
2*05	5.00	10.45	7.95	2*16	18.75	24.20	21.70
2*06	6.25	11.70	9.20	2*17	20.00	25.45	22.95
2*07	7.50	12.95	10.45	2*18	21.25	26.70	24.20
2*08	8.75	14.20	11.75	2*19	22.50	27.95	25.45
2*09	10.00	15.45	12.95	2*20	23.75	29.20	26.70
2*10	11.25	16.70	14.20	2*21	25.00	30.45	27.95
2*11	12.50	17.95	15.45	2*25	30.00	35.45	32.95
2*12	13.75	19.20	16.70				

X9812H-2xXX-N0	Nylon 66 UL94V-0	X9812W	X9812T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

广东星坤科技股份有限公司

Δ生	日期
Δ改	日期
Δ效	日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGULAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
	REVISIONS				UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.25mm Crimp Style Connector
DWN	VIEW:	PART NO.: X9812H-2xXX-N0
CHKD	UNIT: mm/in	DWG NO.: X-X9812H-2xXX-N0
APPD	SIZE: A4	WEIGHT SHEET REVISION 1/1 A0