



SECTION: A-A  
SCALE: 1:1



SECTION: B-B  
SCALE: 1:1

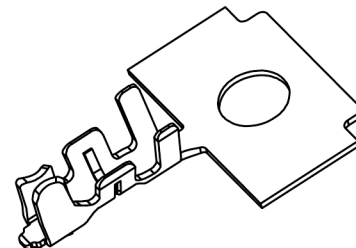

Specifications:

规格:

Voltage rating: 150V AC/DC

额定电压: 150V AC/DC

Current rating: 1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage: 500V AC/minute

耐受电压: 500V AC/分钟

Temperature range: -40°C~+85°C

温度范围: -40°C~+85°C

Insulation resistance: 500MΩ min

绝缘电阻: 500MΩ Min

Contact resistance: 30mΩ Max

接触电阻: 30mΩ Max

X9812 T - P SN - L  
① ② ③ ④ ⑤

1. Series No
2. Category: T-Terminal
3. Material: P-Phosphor Bronze
4. Plating: SN-Tin Plated
5. Type: L

X9812T-PSN-L	Phosphor Bronze	AWG#26~30 O.D1.0mm	X9812H
PART NO	Material	Wire Range	Suitable XKB Housing

广东星坤科技股份有限公司

姓名	日期
数量	日期
MARK	DESCRIPTION
文件	工程章

ANGULAR	±5°
L ≤ 4	±0.2
4 < L ≤ 16	±0.3
16 < L ≤ 63	±0.4
L > 63	±0.5
UNSPECIFIED TOLERANCES	



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.25mm Crimp Style Connector
DWN	VIEW:	PART NO.: X9812T-PSN-L
CHKD	UNIT: mm/in	DWG NO.: X-X9812T-PSN-L
APPD	SIZE: A4	WEIGHT
		SHEET
		REVISION
		1/1
		A0