
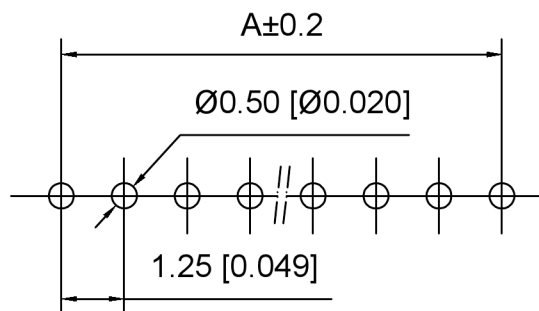


Specifications:  
 规格:  
 Voltage rating:125V AC/DC  
 额定电压: 125V AC/DC  
 Current rating:1A AC/DC  
 额定电流: 1A AC/DC  
 Withstanding voltage:250V AC/minute  
 耐受电压: 250V AC/分钟  
 Temperature range:-25°C~+85°C  
 温度范围: -25°C~+85°C  
 Insulation resistance:100MΩ min  
 绝缘电阻: 100MΩ Min  
 Contact resistance:20mΩ Max  
 接触电阻: 20mΩ Max

X9821 W V - XX - N0 SN  
 ① ② ③ ④ ⑤ ⑥

1. Series No
2. Category:W-Wafer
3. Welding Board Angle:V-Straight 180°
4. Row No.Pin No:XX-02~12P
5. Material:N0-PA66 ; 46-PA46 UL94V-0
6. Plating:SN-Tin Plated

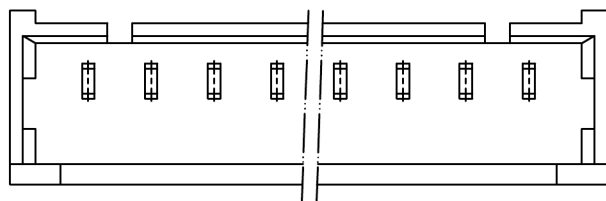

PCB Layout

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	1.25	4.35	08	8.75	11.85
03	2.50	5.60	09	10.00	13.10
04	3.75	6.85	10	11.25	14.35
05	5.00	8.10	11	12.50	15.60
06	6.25	9.35	12	13.75	16.85
07	7.50	10.60		/	/

X9821WV-XX-N0SN	PA66	Phosphor Bronze	X9821H
PART NO	Material	Material(Pin)	Suitable XKB Housing

广东星坤科技股份有限公司

Δ 修改	日期
Δ 修改	日期
Δ 修改	日期

文件工程章

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
					ANGLAR ±5°
					L ≤ 4 ±0.2
					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5



XKB INDUSTRIAL PRECISION CO., LIMITED

DSND	SCALE: N/A	MODEL TYPE: 1.25mm Crimp Style Connector
DWN	VIEW:	PART NO.: X9821WV-XX-N0SN
CHKD	UNIT: mm/in	DWG NO.: X-X9821WV-XX-N0SN
APPD	SIZE: A4	WEIGHT SHEET REVISION 1/1 A0