

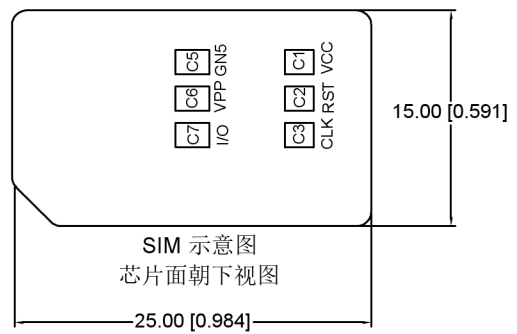



NOTES:
 1) MATERIAL:
 HOUSING: LCP,UL94V-0.COLOR:BLACK
 CONTACT:COPPER ALLOY
 SHELL:STAINLESS STEEL
 2) PLATING:
 CONTACT:GOLD FLASH PLATED ON CONTACT AREA;MATTE TIN PLATING ON SOLDER TAILS,WITH ENTIRE CONTACT UNDERPLATED 50u"Min. NICKEL
 SWITCH PIN:GOLD FLASH PLATED ON CONTACT AREA;GOLD FLASH PLATING ON SOLDER TAILS. WITH ENTIRE CONTACT UNDERPLATED 50u"Min. NICKEL
 SHELL: 50u"Min. NICKEL UNDERPLATED OVERALL,GOLD FLASH PLATED ON SOLDER TAILS
 3) ELECTRICAL REQUIREMNTS:
 CURRENT:0.5A
 VOLTAGE:100V
 CONTACT RESISTANCE:100mΩ MAX
 INSULATION RESISTANCE 100 MEGOHMS MIN
 4)MECHANICAL
 DURABILITY 3000 CYCLES

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05

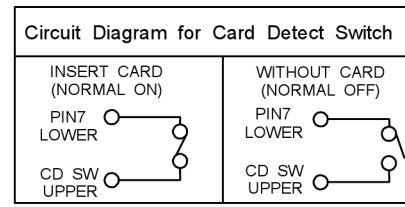

PIN NO.	DESCRIPTION
P1#	C1:VCC
P2#	C5:GND
P3#	C2:RST
P4#	C6:VPP
P5#	C3:CLK
P6#	C7:I/O
P7#	POL
P8#/SW	DET

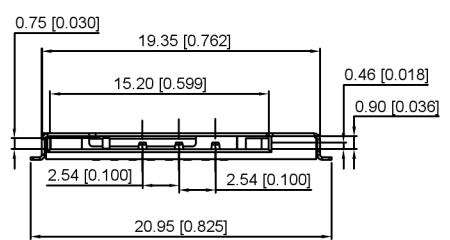

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
③	Shell	1	SUS	
②	Terminal	8	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISIONS
ΔX			
ΔX			
ΔX			

文件工程章

DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES



DSND	SCALE: N/A	MODEL TYPE:
DWN	VIEW:	SIM CARD CONN
CHKD	UNIT: mm/in	PART NO.:
APPD	SIZE: A4	DWG NO.: XKSIM-047
		WEIGHT
		SHEET 1/1
		REVISIO A0