

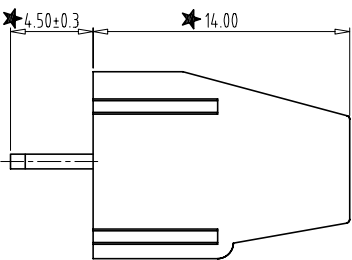
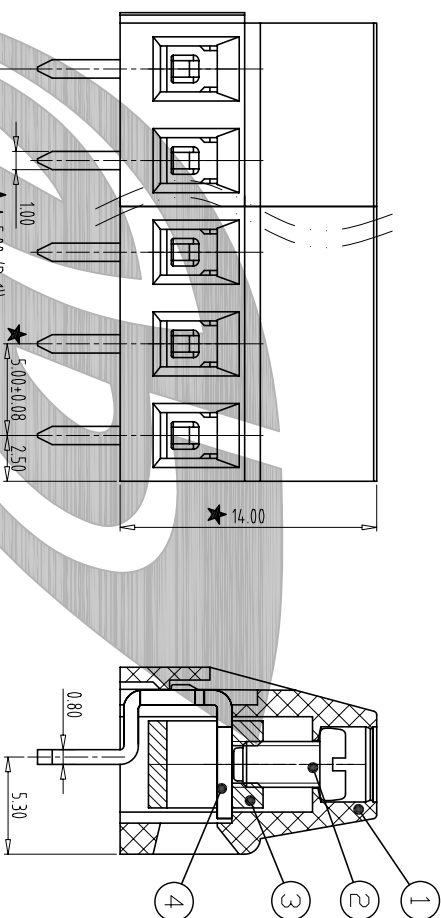
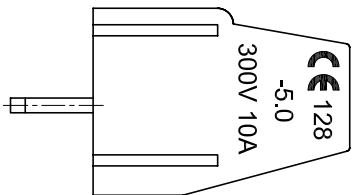


REV	CONTENT	CHK	DATE
V0.0	CONTENT	SK	14.05.08

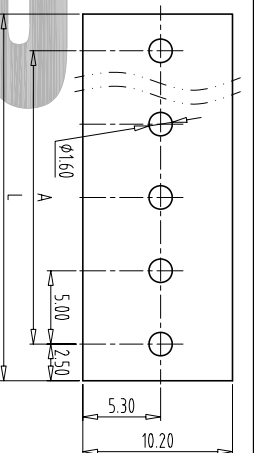

NOTES:

1. Rating:300V 10A;
2. Insulation Withstands Voltage: AC2000V/1MIN
3. Insulation Resistance:
≥500MΩ or more at DC500V
4. Using Temperature Range: -40°C/+105°C
5. Screw Torque Value:0.4Nm
6. Suitable Electric Wire: 12-22AWG

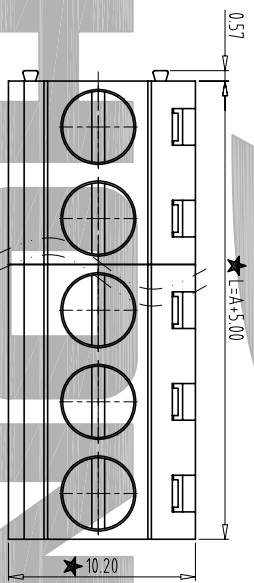

4	SOLDER PIN	ZB128B0001	P	BRASS	Pin Plated
3	BLOCK	ZBXC0001	P	BRASS	Ni Plated
2	SCREW	ZBST0021	P	STEEL	M2.5/Zn Plated
1	HOUSING	ZB128A0XX02 ZB128A0XX03	/	PA66(V0)	02/03P

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	HUIAO	DATE	13.09.26	UNITS	mm
CHK		DATE		SCALE	2.5:1
APP.		DATE		SHEET/OF	A4 / 1
				NAME	ZB128V-XXP-XS(128-铜)

NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD DWGNO: ZB-02-ZB128VXXPXS



Total Pitch Tolerances		Nominal dimension range					
in mm		in mm					
over	0	over	0	over	0	over	0
30	53	70	90	115	150	200	250
to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70
±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90
0.2	0.3	0.3	0.3	0.2	0.3	0.3	0.5