


NOTES:

1. Rating:300V 10A;
2. Insulation Withstands Voltage: AC2000V/MIN
3. Insulation Resistance:  
≥500MΩ or more at DC500V
4. Using Temperature Range: -40°C/+105°C
5. Screw Torque Vlaue:0.4N.m
6. Suitable Electric Wire: 16-26AWG

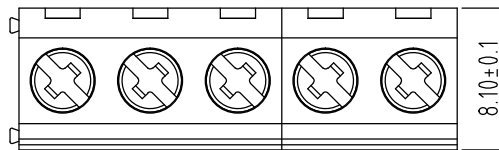

4	SCREW	ZBST0012	P	STEEL	M2.5 , Zn PLATED EP-Fe/Cu1,Zn5
3	BLOCK	ZBXT0007	P	STEEL	Zn Plated EP-Fe/Cu1,Zn5
2	SOLIDER PIN	ZB127B0001	P	BRASS	Sn PLATED EP-Cu/Cu2,Ni1,Sn3
1	HOUSING	ZB127A0001(2P) ZB127A0002(3P)	/	PA66(V0)	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTE
DWG.	HUITAO	DATE	13.09.26	UNITS	mm
CHK.		DATE		SCALE	2.5 : 1
APP.		DATE			
				NAME	ZB127TV-XP-XC(ZB127V)
				DWGNO.	ZB02-ZB127TV-XP-XC
NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD					

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	—	//
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	over	over	over
0	30	53	70	90	115	150	200	250	320	0	30	53	70	90	115	150	200	250	320	0	10	0	100
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	200	250	320	320	30	53	70	90	115	150	200	250	320	320	10	10	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5