
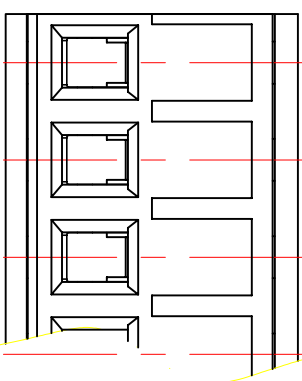
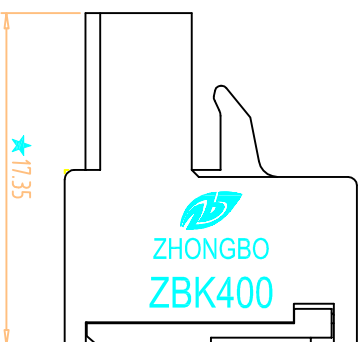
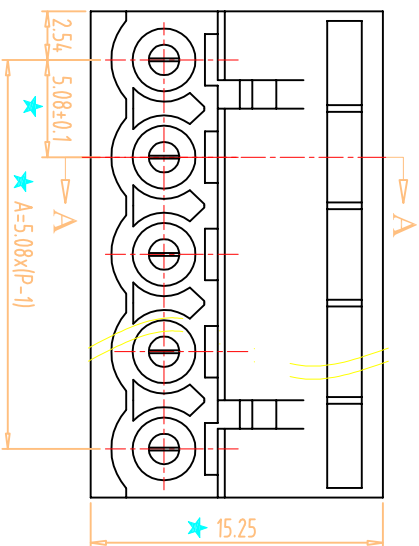


- NOTES:
1. Rating: 300V 15A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C~+105°C
 5. Screw Torque Value: 0.4N.m
 6. Suitable Electric Wire: 28~12AWG
 7. "★" is the important dimension.

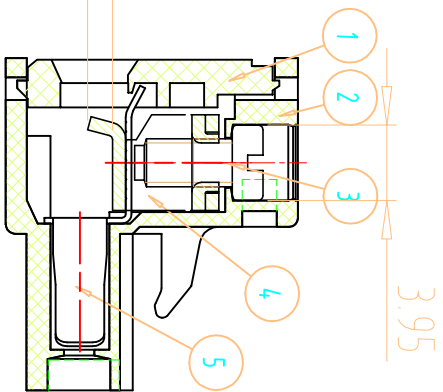

A	Total Pitch Tolerances		Nominal dimension range																																		
	in mm		in mm																																		
over	over	over	0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	320	10	10	all	0	100	150	
to	to	to	±0.18	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5																			

5	CLAMP	ZK4.00C0001	P	BRONZE	Ni Plated
4	BLOCK	ZBX1002	P	STEEL	Zn Plated
3	SCREW	ZBST10017	P	STEEL	M2.5/Zn Plated
2	HOUSING	ZK4.00A3XXXX	1	PA66	UL94V-0
1	COVER	ZK4.00A5XXXX	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	SK	DATE	2014/09/11	SCALE	2.5:1
CHK	DATE				2EDG-5.08#
APP	DATE				ZBK400R-T-XXP-XS

NINGBO ZHONGBO PHOTOVOLTAIC TECHNOLOGY CO., LTD

ZHONGBO

DWGNO: ZB-02-ZBK400RTXXPXS