


Circuit Diagram

PCB Layout(Pattern Side)

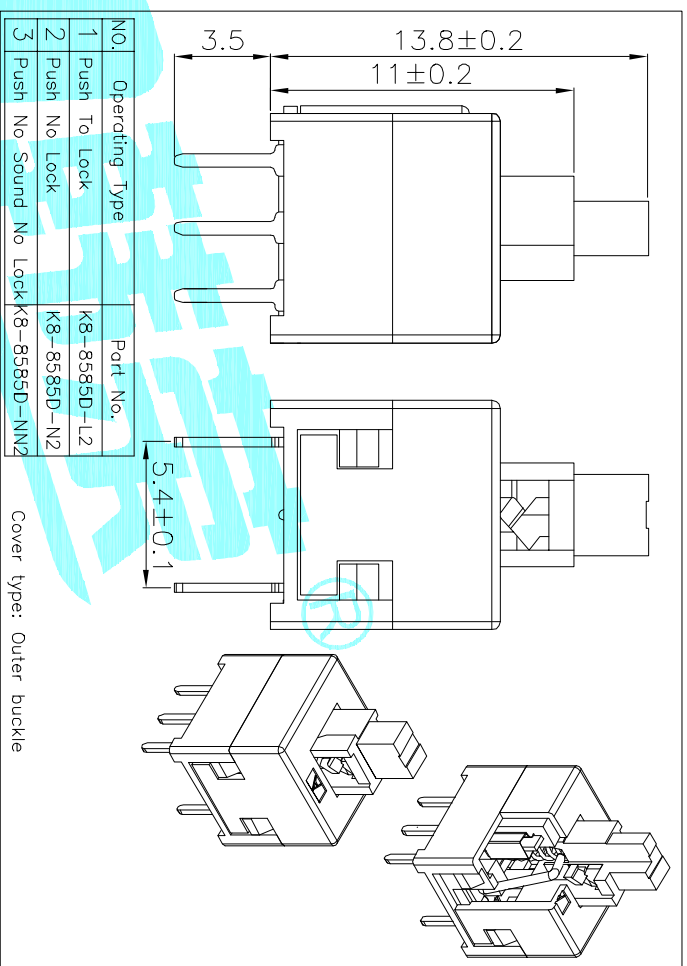

**NOTE:**

1. Operating Force: 240gf±80gf
2. Travel : 2.4±0.3mm

NO.	Operating Type	Part No.
1	Push To Lock	K8-8585D-L1
2	Push No Lock	K8-8585D-N1
3	Push No Sound No Lock	K8-8585D-NN

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑧	Terminal	—	6	Brass strip	Plating silver	—
⑦	Contact	—	2	Phosphor bronze	Plating silver	—
⑥	Securing glue	—	2	PA66	Black	—
⑤	Spring	—	1	SUS	Natural	—
④	Base	—	1	PBT	Black	—
③	Crochet Needle	—	1	SUS	Natural	—
②	Cover	—	1	POM	Gray	—
①	KNOB	—	1	POM	White	—

APPROVALS	DATE	TITLE:
DRAWN J.X.Zhong	2013/10/15	ELECTRONICS CO.,LTD
CHECKED		PUSHBUTTON SWITCHS
APPROVALS		PART NO.

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE	ANGLE	UNIT:	SCALE:	PROJ:
	A		NEW				30±0.15	±0.30	mm	1:1	PROJ: 1 OF 1
							10~30	±0.20			
							5~10	±0.15			
							~5	±0.10			