



SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER	Reverse Voltage - 150 to 200 Volts Forward Current -2.0 Amperes			
DO-214AC/SMA	Features <ul style="list-style-type: none"> ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0 ◆ Metal silicon junction, majority carrier conduction ◆ Low power loss, high efficiency ◆ High forward surge current capability ◆ High temperature soldering guaranteed: 260°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension 			
<p style="font-size: small;">Dimensions in inches and (millimeters)</p>	Mechanical Data <p> Case: JEDEC DO-214AC molded plastic body Terminals: leads solderable per MIL-STD-750, Method 2026 Polarity: Color band denotes cathode end Mounting Position: Any Weight: 0.002 ounce, 0.07 grams </p>			
MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS				
Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.				
	SYMBOLS	SS215	SS220	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	150	200	V
Maximum RMS voltage	V_{RMS}	105	140	V
Maximum DC blocking voltage	V_{DC}	150	200	V
Maximum average forward rectified current at T_L (see fig.1)	$I_{(AV)}$	2.0		A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0		A
Maximum instantaneous forward voltage at 2.0A	V_F	0.85	0.95	V
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	I_R	0.1		mA
		2.0		
Typical junction capacitance (NOTE 1)	C_J	80		pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	70		°C/W
Operating junction temperature range	T_J	-55 to +150		°C
Storage temperature range	T_{STG}	-55 to +150		°C
Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C. 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas				

RATINGS AND CHARACTERISTIC CURVES SS215 THRU SS220


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

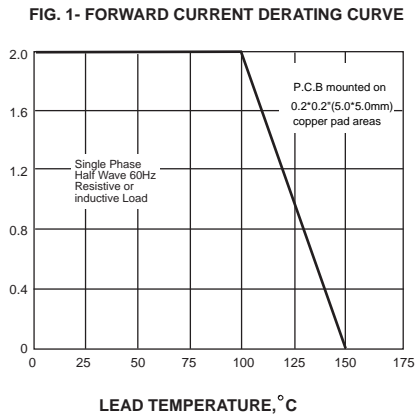


PEAK FORWARD SURGE CURRENT, AMPERES

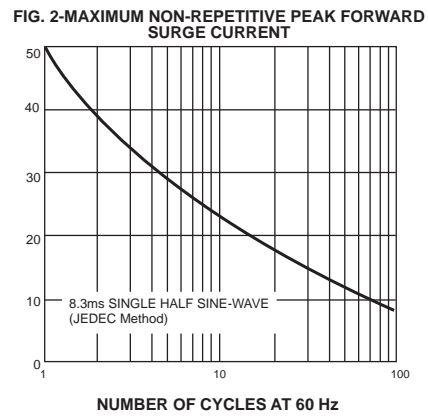


INSTANTANEOUS FORWARD CURRENT, AMPERES

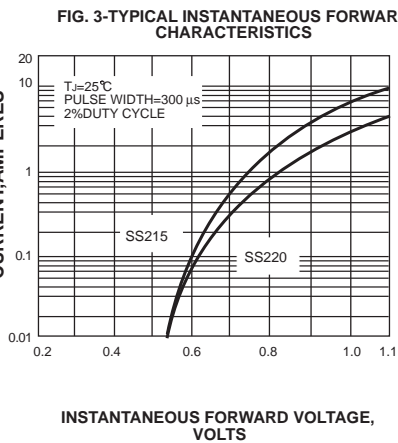

INSTANTANEOUS REVERSE CURRENT, MILLIAMPERES

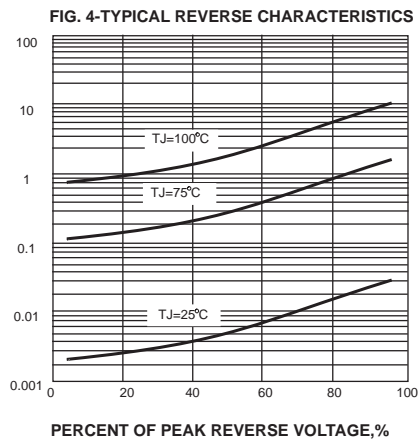

JUNCTION CAPACITANCE, pF

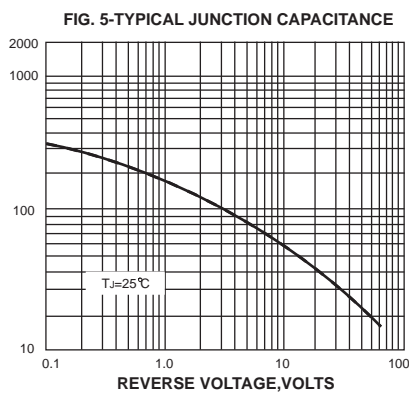

TRANSIENT THERMAL IMPEDANCE, °C/W

