
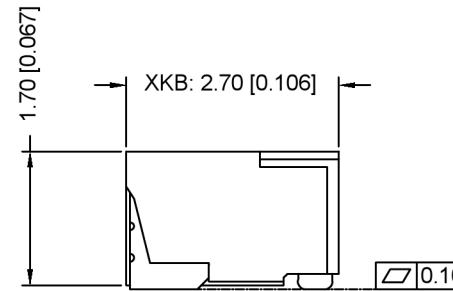



Specifications:

规格:
Voltage rating:30V AC/DC
 额定电压: 30V AC/DC
Current rating: 0.5A AC/DC
 额定电流: 0.5A AC/DC
Withstanding voltage:200V AC/minute
 耐压电压: 200V AC/分钟
Temperature range:-25℃~+85℃
 温度范围: -25℃~+85℃
Insulation resistance:≥100MΩ
 绝缘电阻: ≥100MΩ
Contact resistance: ≤20mΩ
 接触电阻:≤20mΩ
After environment testing: ≤30mΩ
 环境试验后: ≤30mΩ

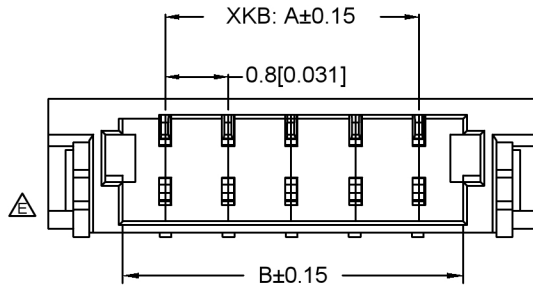

X0800 W R S - XX X- LP XX XX

- ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
- ① Series No.
 - ② Category: W-wafer
 - ③ Welding Board Angle: R-90°
 - ④ Welding Way:S-SMT
 - ⑤ Row No.-Pin No.XX-Single
 - ⑥ Plug the Pin & Special NO.:HF-Halogen free
 - ⑦ Material: LP-LCP 94V-0
 - ⑧ Planting Category : V01:All Gold-Flash;
SN-Bringht tin plating
 - ⑨ Color: Blank-natural color; BK-black

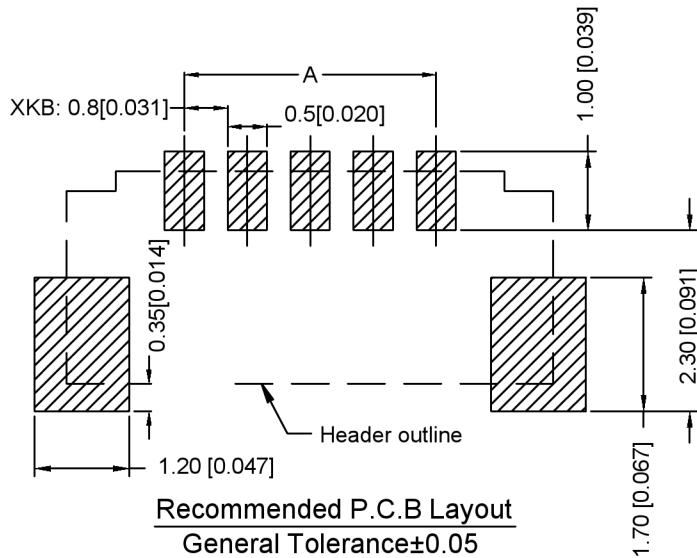

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
2	0.80	1.90	3.78	12	8.80	9.90	11.78
3	1.60	2.70	4.58	13	9.60	10.70	12.58
4	2.40	3.50	5.38	14	10.40	11.50	13.38
5	3.20	4.30	6.18	15	11.20	12.30	14.18
6	4.00	5.10	6.98	16	12.00	13.10	14.98
7	4.80	5.90	7.78	17	12.80	13.90	15.78
8	5.60	6.70	8.58	18	13.60	14.70	16.58
9	6.40	7.50	9.38	19	14.40	15.50	17.38
10	7.20	8.30	10.18	20	15.20	16.30	18.18
11	8.00	9.10	10.98				

PART NO	Material	Material(Pin)	Finish(pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Suitable XKB Housing
X0800WRS-XXHF-LPV01Bk	PA6T UL 94V-0 Black (Halogen-free)	Phosphor Bronze	Gold-Flash	Brass	Gold-Flash	X0800H
X0800WRS-XXHF-LPSNBK	PA6T UL 94V-0 (Halogen-free)		Gold-Flash		Gold-Flash	
X0800WRS-XXHF-LPSN	LCP UL 94V-0 Halogen-free		Gold-Flash		Gold-Flash	
X0800WRS-XXHF-LPV01			Tin-Plated		Tin-Plated	

广东星坤科技股份有限公司

Δ 姓	日期
Δ 效	日期
Δ X	
MARK	DESCRIPTION
文件工程草	REVISIONS

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

MARK	DESCRIPTION	DATE	REVISED	APPROVED	ANGLAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
						UNSPECIFIED TOLERANCES

XKLB

DSND	SCALE: N/A	MODEL TYPE: 0.8mm Crimp Style Connector
DWN	VIEW:	PART NO.: X0800WRS-XXHF-LPXX
CHKD	UNIT: mm/in	DWG NO.: X-X0800WRS-XXHF-LPXX
APPD	SIZE: A4	WEIGHT
KKB INDUSTRIAL PRECISION CO., LIMITED		SHEET
		REVISION
		1/1
		A0